# **SMD POWER TRANSFORMERS**

### **EFD Platforms with Cover**



#### **Features**

- Low profile
- Multiple-output is available
- Operating frequency up to 500kHz
- Custom designs available





### **Application**

Transformer for DVC, DSC,OA, Adaptor,TV,Automotive,DVD,Blue-ray Recorder

## **Specifications**

Size	Fig.	A (Max.)	B (Max.)	C (Max.)	D (Nom.)	E (Nom.)	F (Nom.)	Pins (Optional)		Output Power (W) <sup>2</sup>
SEFD20	1	29.5	21.5	12.5	3.0	24.6	0.7x0.4	6x6	100	20
SEFD25	2	33.0	27.5	15.0	4.0	29.7	1.0X0.4	6x6	100	30

- 1. Operating Temperature:  $-40^{\circ}\text{C} \sim +125^{\circ}\text{C}$  (Includes temperature when the coil is heated).
- 2. Output power is only for reference at flyback topology and switching frequency 100kHz.

#### **Mechanical**

Fig. 1


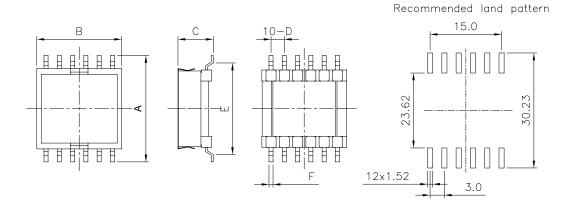


Fig. 2

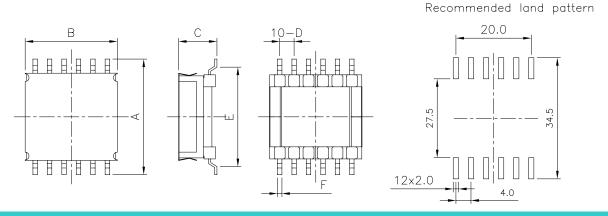

Http://www.ftefl.com Singapore 0065-68487250 / 7253 China 86-020-34569585 Germany 0049-89-12024885